


EXTERIOR

- Acero Inox AISI 304 18/10
- Respaldo en chapa galvanizada

INTERIOR

- Acero Inox AISI 304 18/10
- Desagüe interior
- Fondo embutido con amplios radios
- Iluminación LED 
- Parrillas de alambre de acero plastificado, regulables en altura y fácilmente desmontables
- Marcos puerta calefactados para evitar acumulación de hielo (BT)
- Barra carnicera (AN 1002)

ASLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m³, bajo GWP y cero efecto ODP

PUERTAS

- Contrapuerta embutida
- Burlate de triple cámara fácilmente sustituible
- Puertas con tirador integrado
- Bisagra pivotante con bloqueo de apertura
- Puertas con doble acristalamiento (6-15-5) (AEX)
- Puertas con triple acristalamiento (4-8-3-8-3) (BT CR)

PATAS

- Patas en acero inox regulables en altura hasta 200 mm

REFRIGERACIÓN

- Sistema de condensación ventilada
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa en acero inoxidable
- Control temperatura final del desescarche
- Desescarche por gas caliente (BT)
- Válvula de expansión (BT)


OPCIONAL / OPTIONAL

- Parrilla / Wire shelf AN 500 (502X04)
- Parrilla / Wire shelf AN 1000 (502X02)
- Juego de guías / Slides AN 500 (503X14); 503X19)
- Juego de guías / Slides AN 1000 (503X12; 503X17)
- Barra carnicera / Meat bar set (BCAN)
- Cerradura / Lock (506X120; 506X121)

EXTERIOR

- AISI 304 18/10 stainless steel
- Galvanized steel back

INTERIOR

- AISI 304 18/10 stainless steel
- Internal drain
- Sealed interior floors and rounded cabinet corners
- LED Lighting 
- Plastic coated wire shelves, adjustable height and easy removal
- Heated door frame to avoid accumulation of ice (BT)
- Meat bar set (AN 1002)

INSULATION

- Free CFC's high density (40kg/m³) polyurethane insulation with low GWP & zero ODP effect

DOORS















- Stamped rear door
- Easy removal triple chamber gasket
- Integrated handle doors
- Self closing doors with stay open feature
- Doors with double pane glass (6-15-5) (AEX)
- Doors with heated triple pane glass (4-8-3-8-3) (BT CR)

LEGS

- Stainless steel adjustable legs up to 200 mm

REFRIGERATION

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Stainless steel evaporative tray
- Control of the final defrost temperature
- Hot gas defrost (BT)
- Expansion valve (BT)

MODELOS MODELS														
	Dimensiones LxExH (mm)	Potencia Power (W)	Electrica Electrical (V/Hz)	Capacidad Capacity (L)	Nº puertas Doors	Nº parrillas / J. guías No shelves / Slides	Compresor Compressor (HP)	Potencia frig. Cooling capacity (W a -10°C)	Consumo Consumption (kWh/24h)	Evaporación Evaporation	Régimen T ^{RA} (38°C)	Desescarche Defrost	Control Control	Refrigerante Refrigerant
AN 501 T/F	687x700x2060	650	220/50	500	1	3/3 (530x460)	1/4	298	2,50	Forzada Forced	-2°C/+8°C	Automático Automatic	Digital 30 AMP	R 134 a
AN 1002 T/F	1385x700x2060	820	220/50	1110	2	6/6 (530x510)	3/8	464	3,15	Forzada Forced	-2°C/+8°C	Automático Automatic	Digital 30 AMP	R 134 a
AN 501 BT	687x700x2060	910	220/50	500	1	3/3 (530x460)	1/2	452	5,68	Forzada Forced	-18°C	Automático Automatic	Digital 30 AMP	R 404 A
AN 1002 BT	1385x700x2060	1110	220/50	1110	2	6/6 (530x510)	3/4	617	6,93	Forzada Forced	-18°C	Automático Automatic	Digital 30 AMP	R 404 A

Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice.

ARMARIO DE REFRIGERACIÓN Y CONGELACIÓN SERIE NACIONAL 500/1000 L.
 BOTTOM MOUNTED REFRIGERATOR AND FREEZER REACH IN 500/1000 L.




03 Armarios



AN 1002 BT




AN 501 T/F

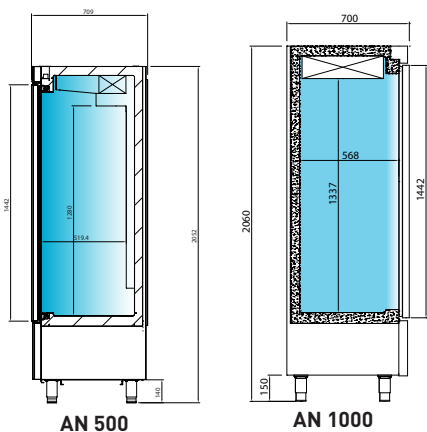


AN 500

AN 1000



AN 501 T/F



AN 1002 T/F



AN 501 BT



AN 1002 BT